
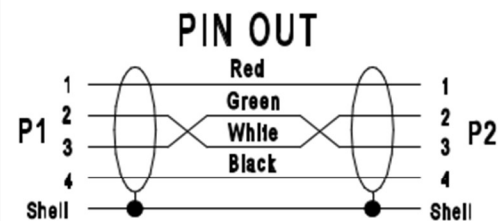


NO.	CONTENT OF REVISE	DATE	REV

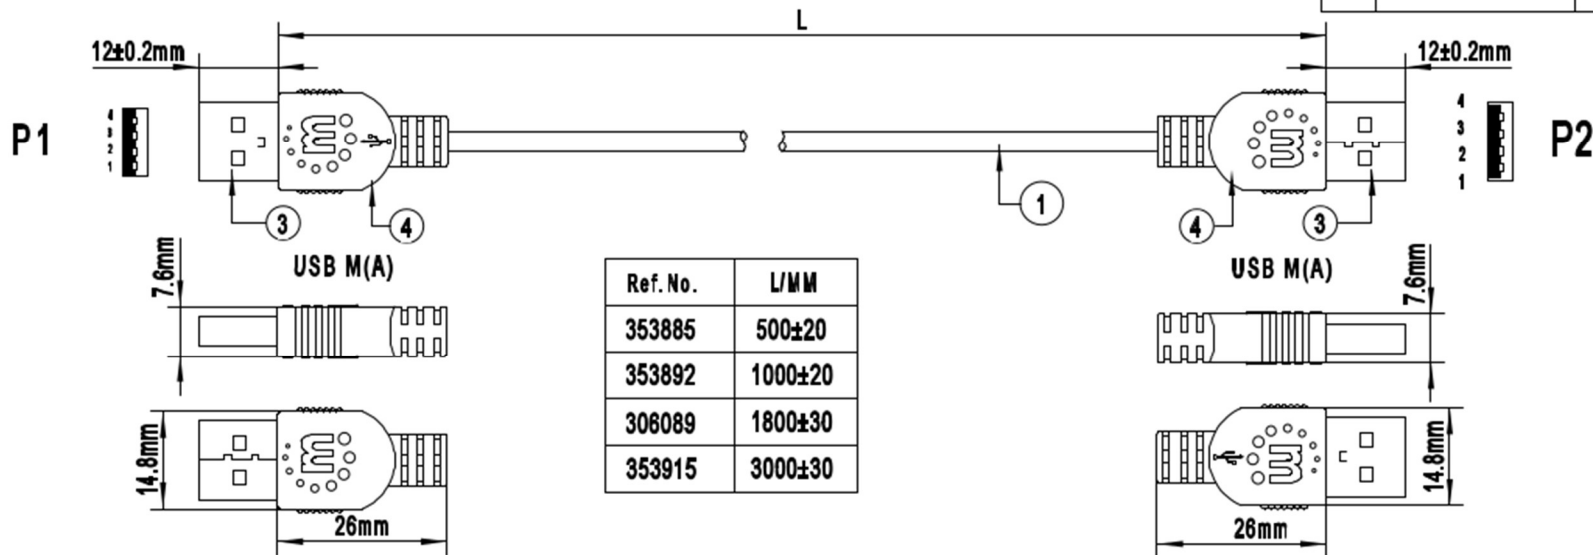

NOTE:

1.ELETRICAL TEST:
100%OPEN SHORT MISS WIRE TEST.
INSULATION:5MΩ

2.Marking:

www.manhattanproducts.com Exxxxxx AWM 2725
80°C 30V USB 2.0 CABLE

Ref. No.	L/MM
353885	500±20
353892	1000±20
306089	1800±30
353915	3000±30

3	Molding	45P Black PVC
2	USB A/MALE	USB A/MALE Soldering type.The Pin Gold plating.Shell Nickel plating
1	CABLE	{28AWG(7/0.12TC+HDPE)*1P+28AWG(7/0.12TC+PVC)*2C}+AL-foil+DW30# (7/0.10BC)+B(16/3/0.12ALM)OD=3.8±0.2mm:PVC JACKET:Color:Black
NO.	ITEM	DESCRIPTION

iNTRACOM

TITLE:	APPD	
	Clock	
CUSTOMER:	Drawer	Date 2019.3.22
CUSTOMER PIN:	Unit	mm
ICT P/N:	Scale	1:1
DWG. NO.	Sheet	1 of
	REV	A1

TOLERANCE(INCH)		TOLERANCE(MM)	
3	±0.02"	X	±0.5mm
3.X	±0.01"	X.X	±0.25mm
3.XX	±0.005"	X.XX	±0.15mm
3.XXX	±0.005"	X.XXX	±0.10mm