





REV.	DESCRIPTION	ENG.	APPROVAL

P1

P2



Ultra High Speed HDMI™ Cable with Ethernet E***** 兎 AWM STYLE 20276 80℃ 30V VW-1

Cable Marking:

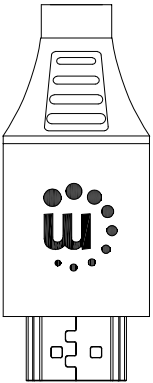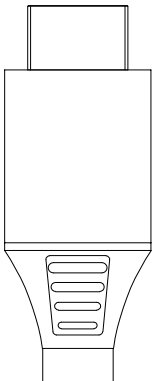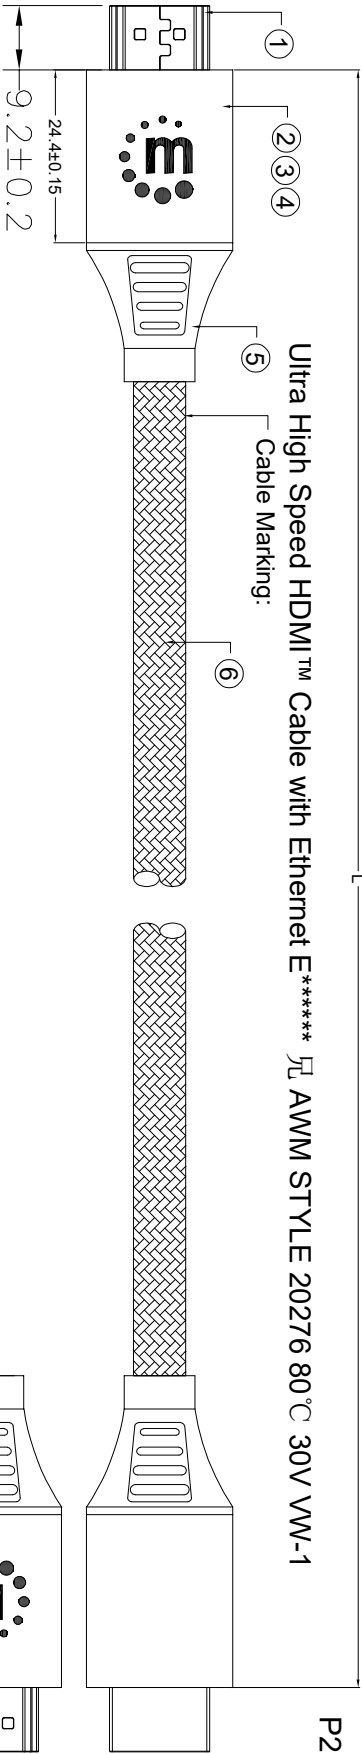

SKU	Length
5001-76B-1M	1000 ±30
5001-76B-2M	2000 ±30

PIN Assignment
P1 HDMI AM P2 HDMI AM

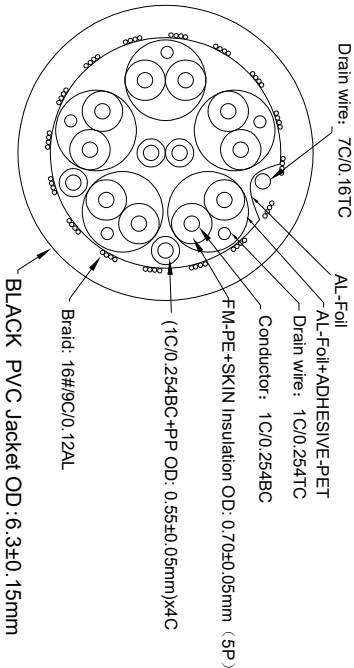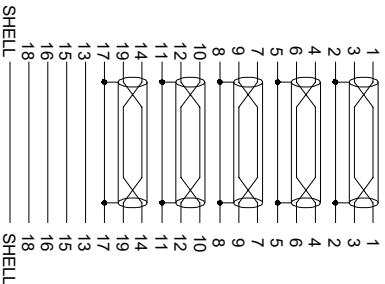

- ELECTRICAL TEST:
- 1.100% OPEN SHORT MIS WIRE TEST
 - 2.CONTACT RESISTANCE:10 OHM MAX
 - 3.INSULATION RESISTANCE:5M OHM MIN
 - 4.HI-POT TEST:DC 300V/10ms
 - 5.PASS 8K@60Hz,4K120Hz,4.4:4 TEST

6	Cable	30#(1/0.254BC+1P+D1/0.254TC+AL-Foil+ADHESIVE+PET)*5C+1/0.254BC*4C+AL-Foil+D7/0.16TC+144#0.12AL BLACK PVC Jacket OD:6.3±0.15mm	M
5	MODEL	BLACK 45P PVC molding	xxg
4	SHELL	Gun metal Black SHELL	2PCS
3	MODEL	PE,Nature color	xxg
2	Copper foil	Copper foil size:5mm	cm
1	Connector	Connector HDMI AM 19P PIN:G/F, SHELL: Gold plated & Tinplate	2PCS
NO	ITEM	DESCRIPTION	QTY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co.,Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co., Ltd.

UNLESS OTHERWISE SPECIFIED,DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°

TOLERANCE(INCH)	TOLERANCE(MM)
X	±0.02"
X.X	±0.01"
X.XX	±0.008"
X.XXX	±0.005"

TITLE: HDMI Cable with Ethernet M-M Black		APPD Check		YAN	
CUSTOMER: CUSTOMER P/N:		Drawer		YAN	
ICT P/N:		Unit		mm	
DWG.NO:		Scale		1:1	
		Sheet		1 of	
		REV.		A	

INTRACOM

安達康股份有限公司
INTRACOM Asia Co.,LTD.