


REV.	DESCRIPTION	ENG.	APPROVAL
A	Initial Release		

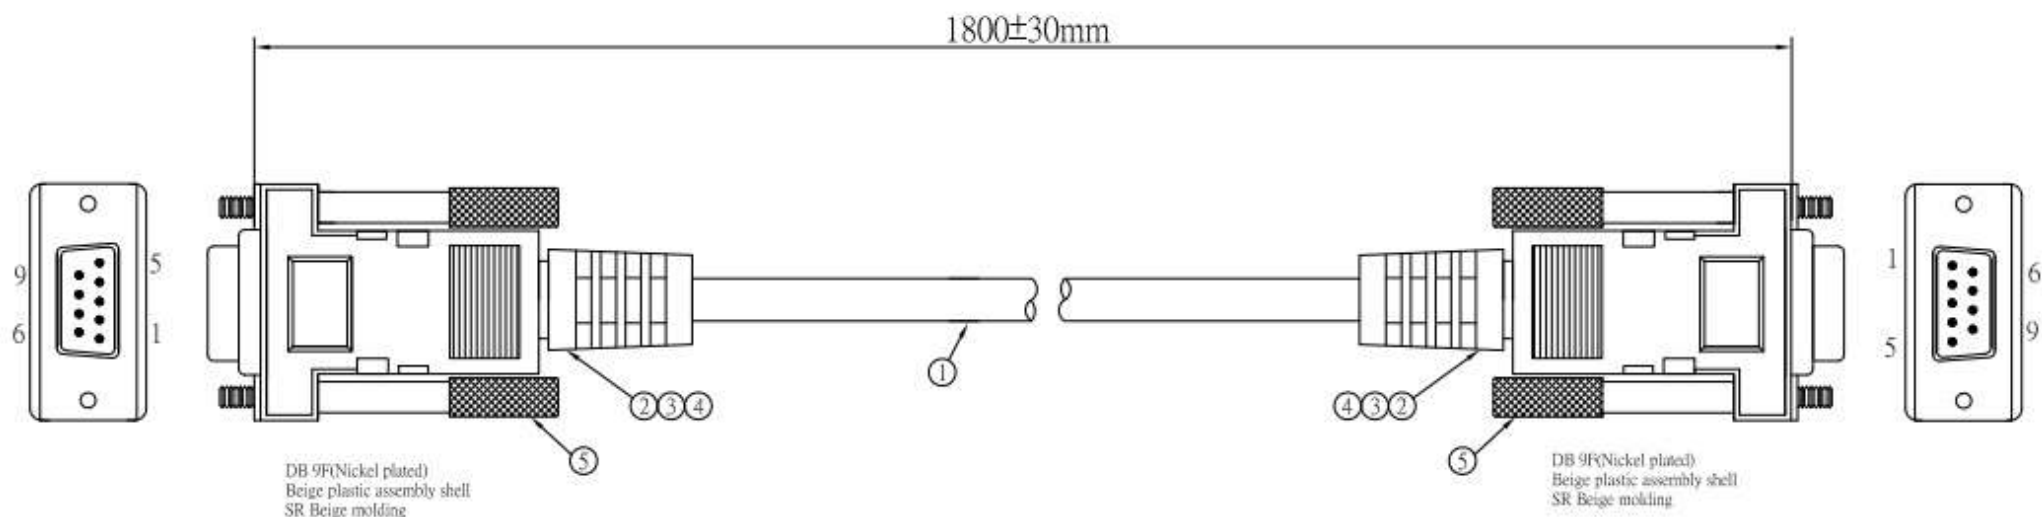

PIN ASSIGNMENT:

DB9F	1	2	3	4	5	6	7+8	64
DB9F	7+8	3	2	6	5	4	1	64

OPEN/SHORT TEST: 100% TEST.
INSULATION: MIN 5M.

⑤	Screw: INCH, #4*44-J, Nickel plated	4PCS
④	Black 45P PVC	5g
③	Beige plastic assembly shell	2PCS
②	DB 9F(Black insulator,Nickel plated)	2PCS
①	NON-UL AL-FOIL 30#*7C+1 OD=4.5mm Beige PVC Jacket.	1PCS
No.	Description	Qty

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1°

TOLERANCE(INCH)	TOLERANCE(MM)
x	±0.5mm
x.x	±0.20mm
x.xx	±0.15mm
x.xxx	±0.10mm



TITLE:	APPD	VID
Check		
CUSTOMER:	Drawer	Date: 2021.09.17
CUSTOMER P/N:	Unit	mm
Scale	1:1	Size: A4
DWG.NO: REV.1.0 09/2021	Sheet	1 of REV. A