


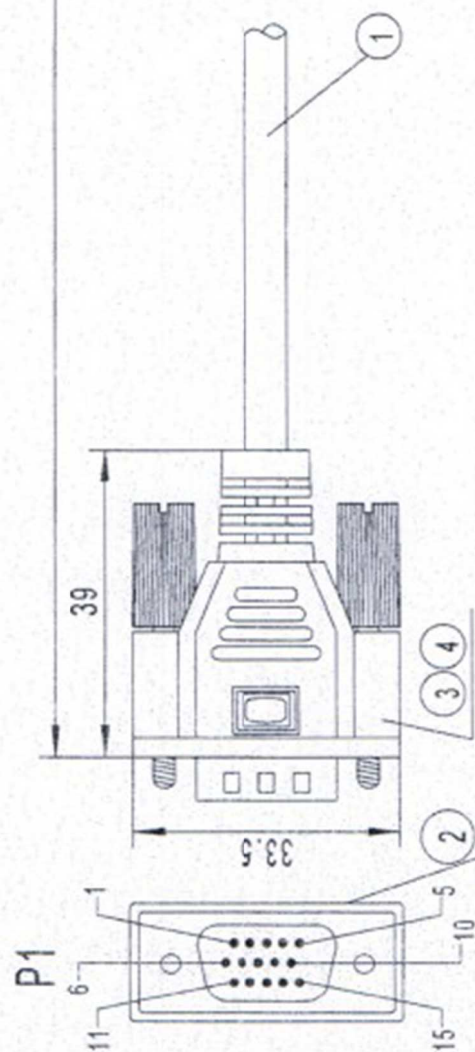
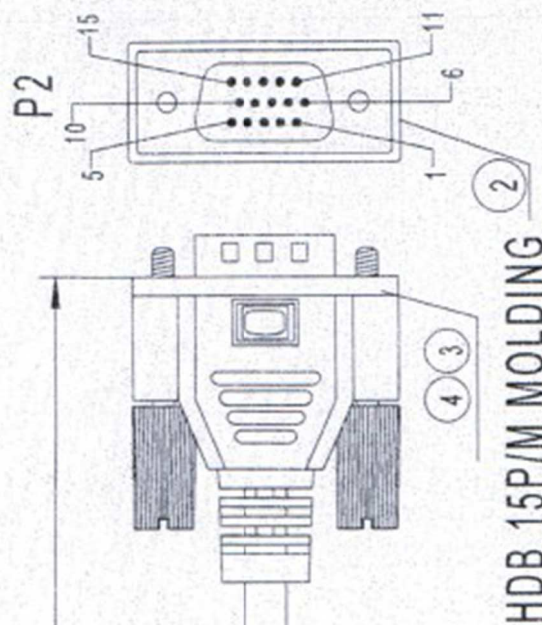


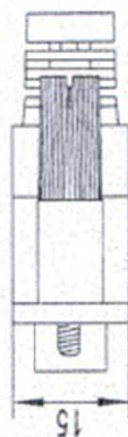

HDB 15P/M MOLDING

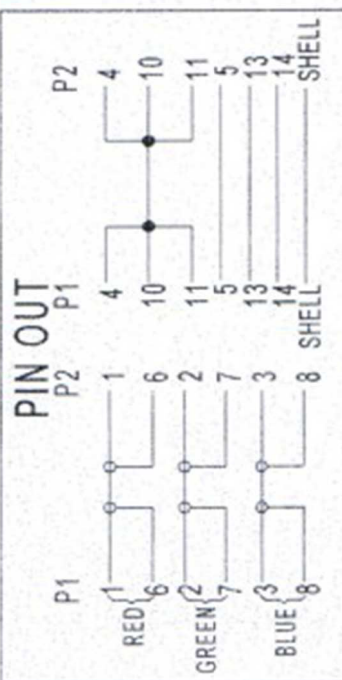

HDB 15P/M MOLDING



NO.	ITEM	DESCRIPTION
4	SCREW	THUMB SCREW(Length 36.5mm)x4PCS
3	PVC	45P PVC BLACK
2	CONN	HDB 15PIN MALE, PLATED NICKEL, INSULATION BLUE (30#1C(7/0.10BC)+DW30#(7/0.10BC)+AL.MY)3COAX+4C*30#(7/0.10BC)+AL-foil+DW30#(7/0.10BC)+8(16/4/0.12ALM)+JACKET OD=5.5±0.2mm;PVC JACKET:Color:Black
1	CABLE	

NOTE:

1.ELECTRICAL TEST:

(1)100%OPEN SHORT MISS WIRE TEST.

(2)Min INSULATION RESISTANCE:Min,DC 250V 2Mohm

(3)Max. CONDUCTOR RESISTANCE: 6ohm

2. CABLE MARKING:

Exxxxxx 9J AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE

INTRACOM

TITLE:

APPRO

Check

Drawn

CUSTOMER

CUSTOMER P/N

ICT P/N

DWG. NO.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE 1°

TOLERANCE(INCH)	TOLERANCE(MM)
F ±0.02"	F ±0.5mm
X.X ±0.01"	X.X ±0.25mm
X.XX ±0.005"	X.XX ±0.125mm
X.XXX ±0.0025"	X.XXX ±0.063mm

Date

Projection

Unit

Scale

Sheet

REV