




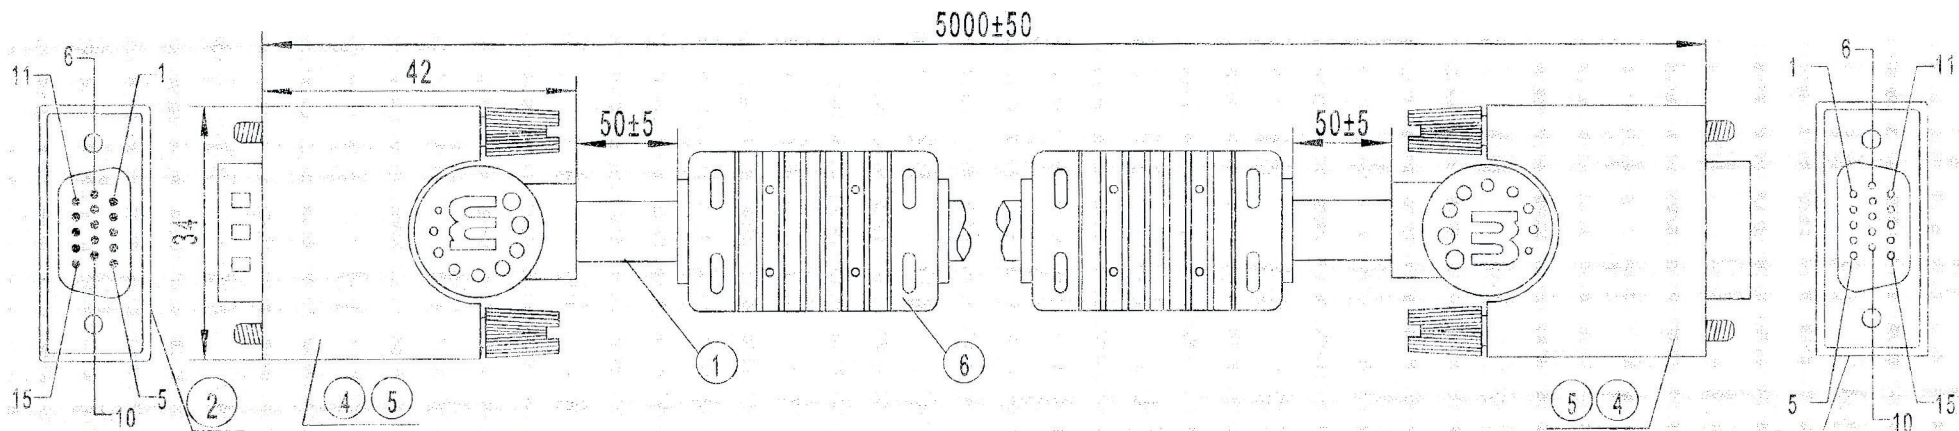

P1 HDB 15P/M MOLDING

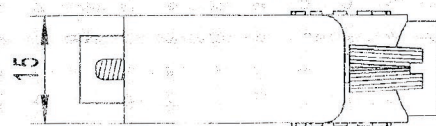

HDB 15P/F MOLDING P2

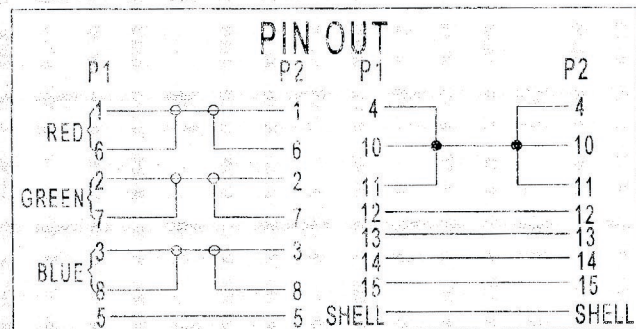

6	FERRITE	17*28*10mm
5	SCREW	THUMB SCREW(Length 44mm)*4PCS
4	PVC	45P PVC BLACK
3	CONN	HDB 15PIN FEMALE, PLATED NICKEL, INSULATION BLUE
2	CONN	HDB 15PIN MALE, PLATED NICKEL, INSULATION BLUE
1	CABLE	{28#1C(7/0.12BC+FPE)*S(22±2/0.12CCA)+PVC}*3COAX+6C*28#(7/0.12BC+PE)+AL-foil+DW28#(7/0.12BC)+B(16/6/0.12ALM)OD=8.0±0.3mm;PVC JACKET:Color:Black